


QUICK REFERENCE GUIDE

NOTE: When the unit is first switched on the display shows 'PLEASE RE-RECORD' and the unit beeps every 30

When the SD1 is not being used the display shows '-ON-'. To initialise it press and hold the **ENT** key for 6

If the unit is not operated for 1 minute, it will revert to its normal standby mode and the display will show

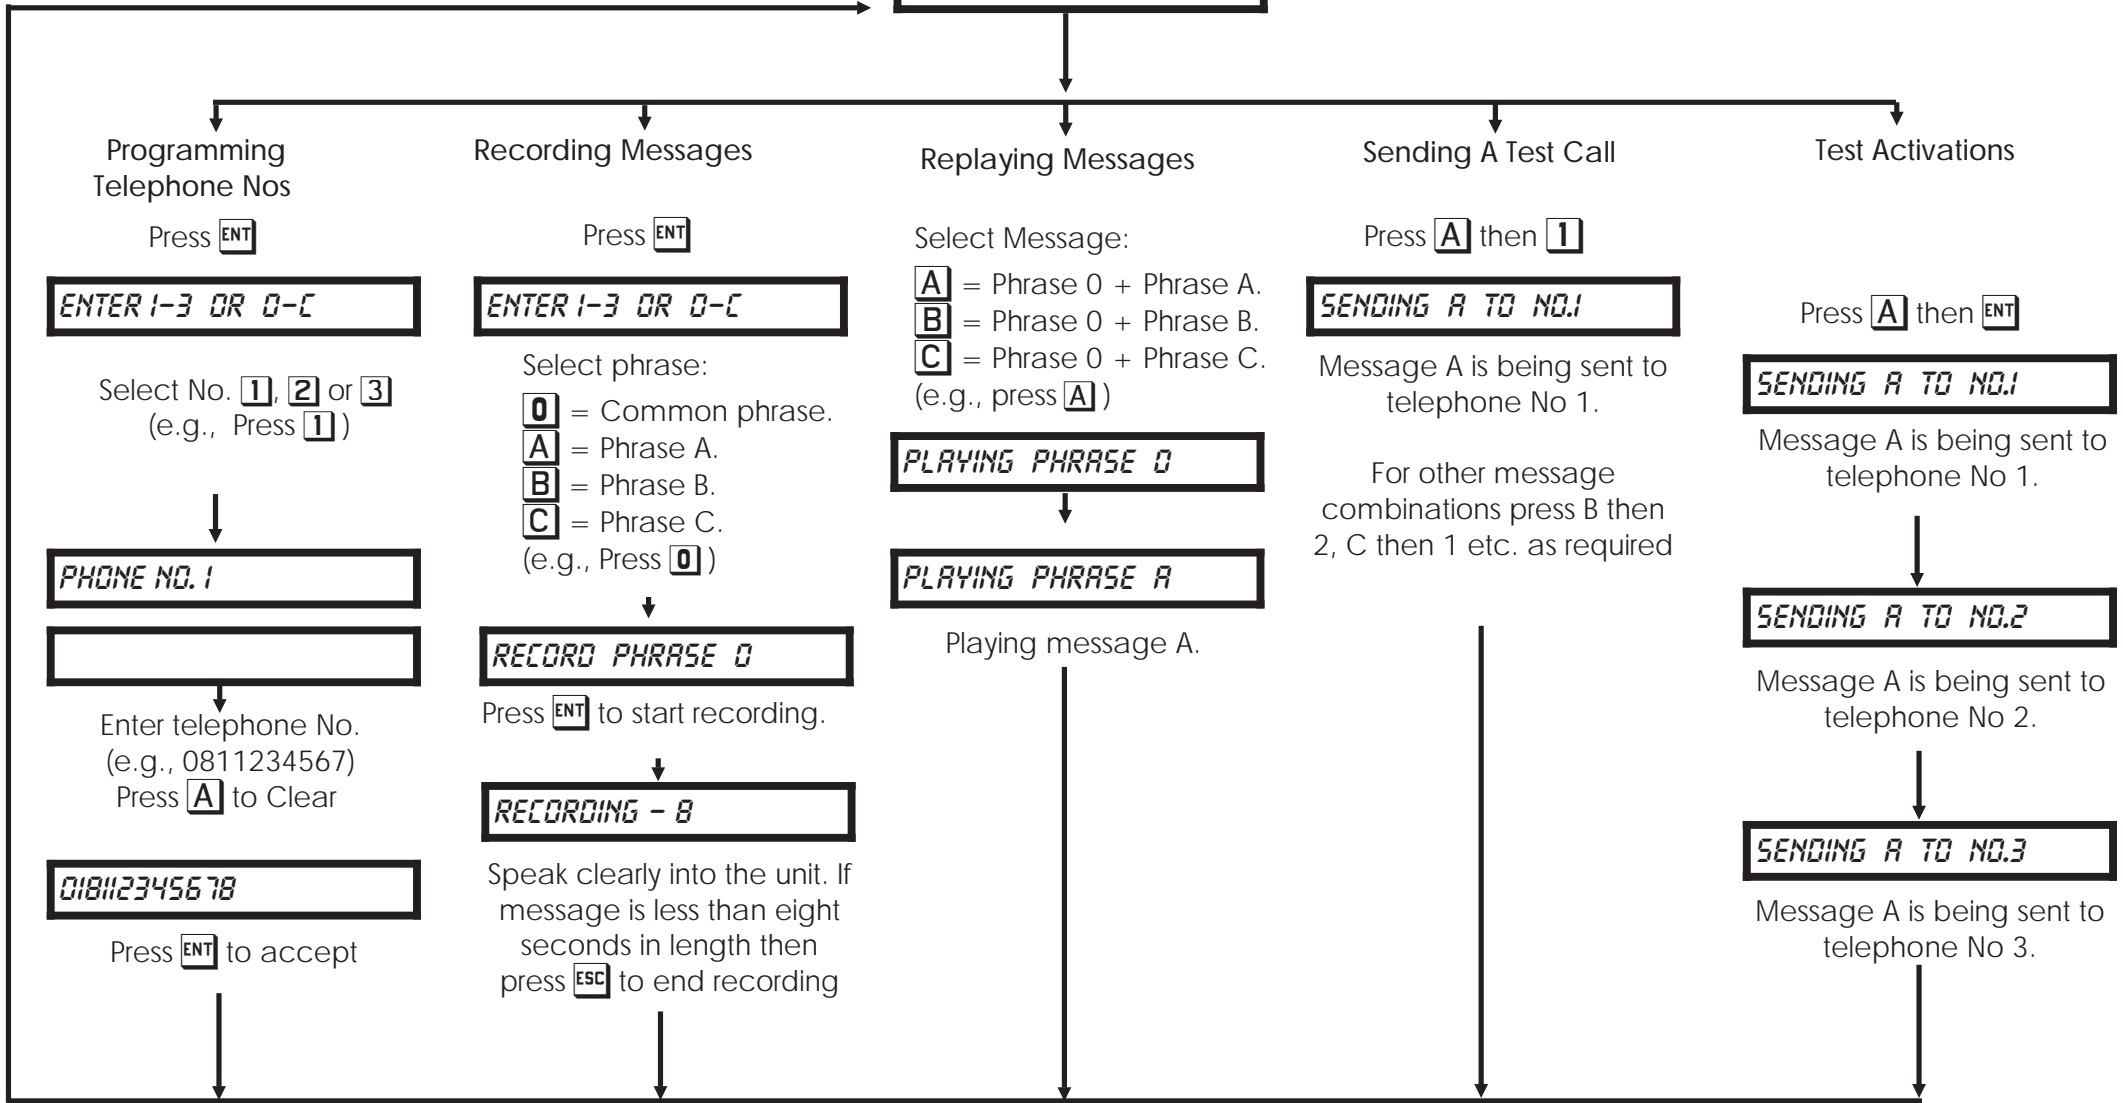

Programming Telephone Nos

Press **ENT**

ENTER 1-3 OR 0-C

Select No. **1**, **2** or **3**
(e.g., Press **1**)

PHONE NO. 1

[Empty display box]

Enter telephone No.
(e.g., 0811234567)
Press **A** to Clear

018112345678

Press **ENT** to accept

Recording Messages

Press **ENT**

ENTER 1-3 OR 0-C

Select phrase:

- 0** = Common phrase.
 - A** = Phrase A.
 - B** = Phrase B.
 - C** = Phrase C.
- (e.g., Press **0**)

RECORD PHRASE 0

Press **ENT** to start recording.

RECORDING - 8

Speak clearly into the unit. If message is less than eight seconds in length then press **ESC** to end recording

Replaying Messages

Select Message:

- A** = Phrase 0 + Phrase A.
 - B** = Phrase 0 + Phrase B.
 - C** = Phrase 0 + Phrase C.
- (e.g., press **A**)

PLAYING PHRASE 0

PLAYING PHRASE A

Playing message A.

Sending A Test Call

Press **A** then **1**

SENDING A TO NO.1

Message A is being sent to telephone No 1.

For other message combinations press B then 2, C then 1 etc. as required

Test Activations

Press **A** then **ENT**

SENDING A TO NO.1

Message A is being sent to telephone No 1.

SENDING A TO NO.2

Message A is being sent to telephone No 2.

SENDING A TO NO.3

Message A is being sent to telephone No 3.